

DESCRIPTION

The KG8360 series GDT offers high surge ratings in a miniature package. It's designed for surface mounting on PCB with size 8.3x8.3x6.0 mm. Special design features provide high levels of protection against fast rising transients in the 100V/ μ s to 1kV/ μ s range usually caused by lightning disturbances. Low insertion loss is perfectly suited to broadband equipment applications. The capacitance does not vary with voltage, and will not cause operational problems with ADSL2+, where capacitance variation across Tip and Ring is undesirable. For AC Power Cross of long duration, over current protection is recommended.

FEATURES

- > RoHS compliant and Lead-free.
- > High insulation resistance.
- > Low capacitance
- > Max Surge current capacity 5000A 8/20 μ s.
- > Surface Mounted Gas Arrester
- > Size 8.3x8.3x6.0mm

APPLICATIONS

- > Communication equipment.
- > Repeaters, Modems.
- > Telephone Interface, Line cards.
- > Data communication equipment.

PART NUMBER CODE

K G 8360 B 150

DC Breakdown Voltage: 090=90V, 150=150V, 200=200V, Etc.

Polar: B=Bidirectional, U=Unidirectional


Product Size: 8360=8.3x8.3x6.0mm

Product Line: G=Gas Discharge Tube

Kangtai Brand



8.3x8.3x6.0mm




GRAPHICAL SYMBOL

ELECTRICAL CHARACTERISTIC

PART NUMBER	DC BREAKDOWN VOLTAGE	TOLERANCE OF Vs	IMPULSE SPARK-OVER VOLTAGE	IMPULSE DISCHARGE CURRENT	INSULATION RESISTANCE		C@1MHz Max.
	100V/s				Gohm Min.	DC	
KG8360B070	70V	±20%	900V	20000A	1	25V	1.5pF
KG8360B090	90V	±20%	900V	20000A	1	50V	1.5pF
KG8360B150	150V	±20%	900V	20000A	1	100V	1.5pF
KG8360B200	200V	±20%	900V	20000A	1	100V	1.5pF
KG8360B300	300V	±20%	1000V	20000A	1	100V	1.5pF
KG8360B350	350V	±20%	1000V	20000A	1	100V	1.5pF
KG8360B400	400V	±20%	1050V	20000A	1	100V	1.5pF
KG8360B600	600V	±20%	1150V	20000A	1	100V	1.5pF
KG8360B800	800V	±20%	1200V	20000A	1	100V	1.5pF

PRODUCT DIMENSIONS

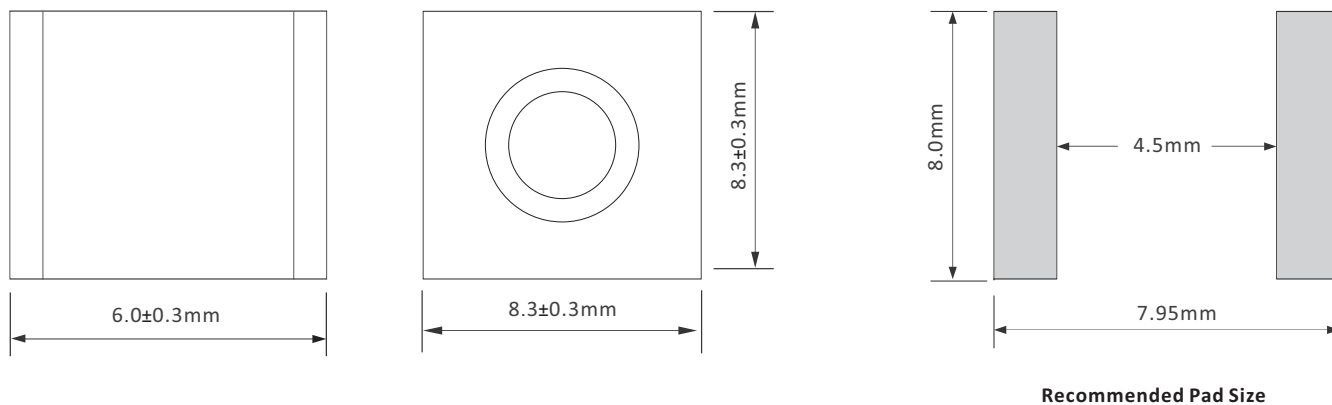

ENVIRONMENTAL RELIABILITY CHARACTERISTICS

Testing Items	Technical Standards
High Temperature Storage Test	Temperature:85°C;Time:2H
Low Temperature Storage Test	Temperature:-40°C;Time:2H
Vibration	Frequency:10-500Hz;Amplitude:0.15mm;Time:45min
Resistance of soldering heat	Temperature:260°C;Time of dip soldering:10s,1time

SOLDERABILITY TEST

Solderability	Solder Pot Temperature:	245±5°C
	Solder Dwell Time:	4~6 seconds

REFLOW PROFILE

Reflow Condition		Lead-free assembly
Pre Heat	Temperature Min (Ts(min))	150°C
	Temperature Max (Ts(max))	200°C
	Time (min to max) (ts)	60 – 180 secs
Average ramp up rate (Liquidus Temp (TL) to peak)		3°C/second max
Ts(max)to TL - Ramp-up Rate		3°C/second max
Reflow	Temperature (TL) (Liquidus)	217°C
	Time (min to max) (ts)	60 – 150 seconds
Peak Temperature (TP)		260°C
Time within 5°C of actual peak Temperature (tp)		~10 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (TP)		8 minutes Max.
Do not exceed		260°C

